


THIRD ANGLE PROJECTION.

MOTOR SPECIFICATION

808557NVB-B11 Y001089 CUSTOMER NO. Q.R. No. **CUSTOMER LOVELOCK LUKE** 240 **50** A.O.M. **VOLTS** Hz Ph Duty MOTOR RPM. 900 3.0 **AMPS** RATING **450 WATTS** NOM. OUTPUT **CLOCKWISE AT DRIVE END ROTATION** CAPACITOR START μF/V RUN 20/440 μF/V **ENCLOSURE VENTED** В **CSR** INSULATION CLASS MOTOR TYPE **AUTO RESET OVERLOAD** THERMAL PROTECTION **FAN - SHAFT UP APPLICATION** BEARING D.E. 6204 ZZ LONG LIFE, LUBRICATION **WIDE RANGE** BEARING N.D.E. 6202 ZZ SINGLE CORE 2300±30 BRAIDED SLEEVING SUPPLY LEAD **VIA SUPPLY LEAD EARTH PROVISION BASIC BUILD** 305-697-01 **SPECIFICATION** PAINT/ **PC GREY COLOUR** PERFORMANCE SP85188-01 **SPECIFICATION**

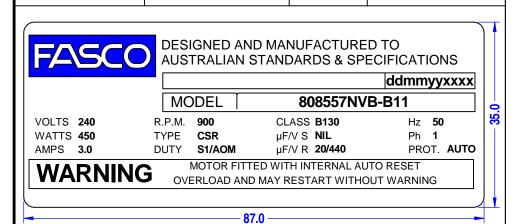


393-517-01

RATING

LABEL

SSTDAUTO.FMT

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

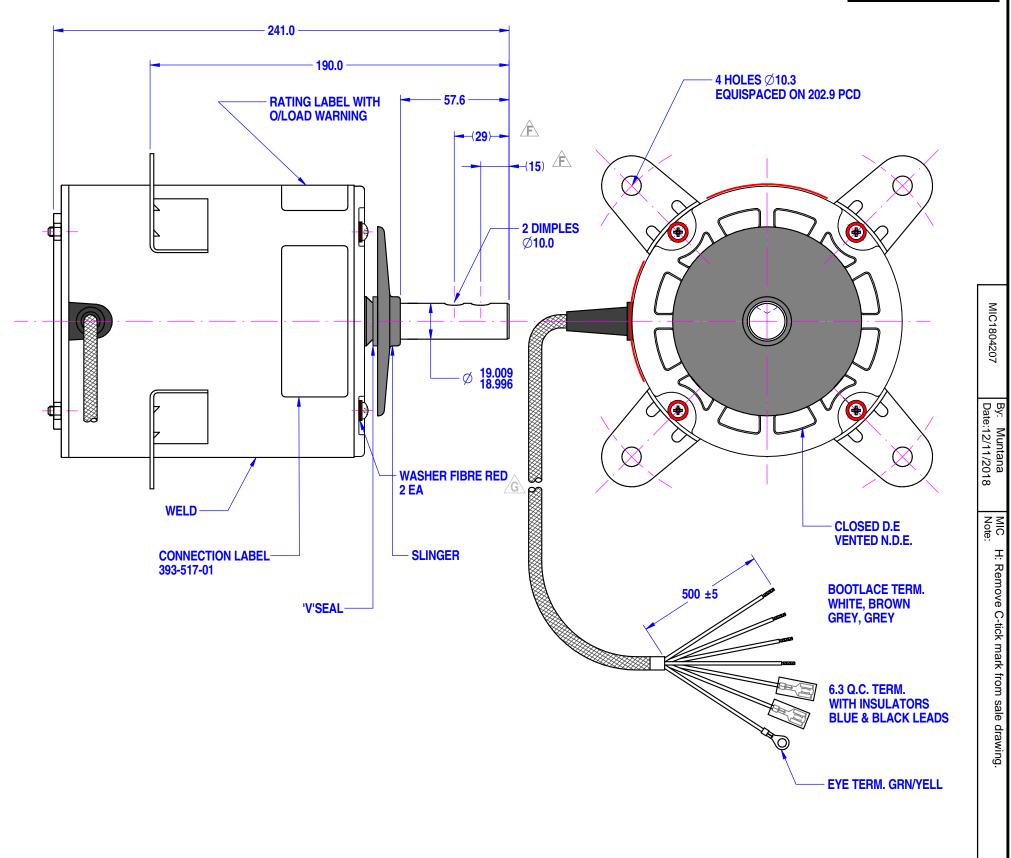

SPECIAL REQUIREMENTS:

CONNECTION

DIAGRAM

- 1)_DE.ENDSHIELD TO BE WEATHERPROOF MOTORS TO ES050 , 20mm. 'V'SEAL AND SLINGER FITTED AT DRIVE END.
- 2) N.D.E. ENDSHIELD NOT PAINT.
- 3)_WET PAINT GREY (RAL-9073) ON D.E. ENDSHIELD.
- 4) WASHER FIBRE TO BE FITTED ON TIE RODS D.E. ENDSHIELD.

UNLESS OTHERWISE SPECIFIED:				
DIMENSIONS ARE IN MM.				
TOLERANCES				
DECIMALS	ANGULAR			
.X ± 1.0	± 30'			
VV 1 0 1				

THIS DRAWING REMAINS THE PROPERTY OF FASCO

MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

	10.0		
		kg.	
DRAWN	Montree	21/03/2001	
CHECKED	Pipat	12/11/2018	
RELEASED	Suksakorn	13/11/2018	
SCALE	N.T.S.		

10 8

MOTOR WEIGHT



29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTHABURI DISTRICT, NONTHABURI 11000 THAILAND

FRAME	MOTOR	
R	B188:8557V-450-HAD:LGL	
SHEET	DWG NO	REVISION

DWG. NO. 808557NVB-B11

Н