



Tecumseh

Compressor
Voltage Code : XG

FH4532Z-XG1A


High Temp. Commercial (HP)

380-420V 3~ 50Hz / 460V 3~ 60 Hz

R452A / R404A / R448A / R449A

FH4532ZXG1A

Conditions	Frequency	Nominal Cooling Capacity		Sound Power ISO3745 / ISO 3743-1
		Watts	BTU/h	
EN12900 / R452A	50 Hz / 60 Hz	6260 / 7561	21348 / 25783	73 dBA
EN12900 / R404A	50 Hz / 60 Hz	6248 / 7547	21307 / 25734	73 dBA
EN12900 / R448A	50 Hz / 60 Hz	6270 / 7572	21380 / 25821	73 dBA
EN12900 / R449A	50 Hz / 60 Hz	6270 / 7572	21380 / 25820	73 dBA

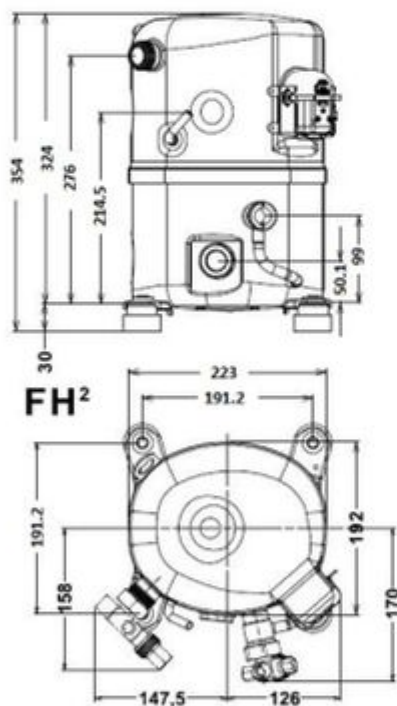

Displacement (cc)	50.6
Net Weight (Kg)	28.0
Oil Quantity (cc)	1140.0
Oil Type	Polyolester
Expansion Device	Capillary_Tube/Expansion_Valve
Cooling	Fan
Main Winding (Ohm)	10.4
Current	
RLA (A)	4.1 4.5
MCC (A)	7.3
LRA (A)	30
Electrical Equipment	TRI
Overload	Interne
Refrigerating connection for OD	
Suction Tube	22.2 (7/8")
Discharge Tube	12.7 (1/2")
Process Tube	6.35 (1/4")

* EN12900 : T*Cond. 50.0°C / T*Evap. 5.0°C / T*Return gas temp.. 20.0°C
T*Subcooling. 0.0K

Certificates :



Note : Tecumseh reserves the right to change information contained in this document without notification.