

Low Profile Unit Coolers




- Optimised 3/8" Rifle Bore Tube Coils
- Light Weight Alu Case - 'Signal White' Powder Coat
- Factory Applied "Blue Coil Coat" Corrosion Protection
- High Airflow External Rotor Motors
- Reversible Drain Trays
- Low Temp Heater Safety Klixon


P SERIES

1.9 22.5 kW


MEDIUM TEMP

MODELS	PM	30	40	50	60	70	80	95	105	110	130	140	160	190	210
Capacity kW @ 6 KTD -4°C SST	R404A	3.03	4.17	5.04	6.09	7.17	8.28	9.72	10.65	11.28	13.29	14.34	16.38	19.41	21.48
	R407F	3.18	4.38	5.28	6.39	7.53	8.70	10.20	11.16	11.85	13.95	15.06	17.19	20.37	22.53
	R22	2.97	4.08	4.92	5.97	7.02	8.10	9.54	10.44	11.04	13.02	14.04	16.05	19.02	21.06
	R134a	2.76	3.78	4.59	5.55	6.54	7.53	8.85	9.69	10.26	12.09	13.05	14.91	17.67	19.53
T.X Valve	R404A	A-SW	A-SW	A-SW	B-SW	B-SW	B-SW	C-SW	C-SW	C-SW	C-SW	C-SW	D-SW	D-SW	D-SW
SCE / ECE 	R407F	AA-VW	A-VW	A-VW	A-VW	A-VW	A-VW	B-SW	B-SW	B-SW	B-SW	B-SW	C-SW	C-SW	C-SW
	R22	AA-VW	A-VW	A-VW	A-VW	A-VW	A-VW	B-SW	B-SW	B-SW	B-SW	B-SW	C-SW	C-SW	C-SW
	R134a	AA-JW	AA-JW	A-JW	A-JW	A-JW	A-JW	B-JW	B-JW	B-JW	C-JW	C-JW	C-JW	C-JW	D-JW

LOW TEMP

MODELS	PL	22	30	45	60	70	80	95	120	130
Capacity kW @ 6 KTD -24°C SST	R404A	2.25	3.12	4.56	6.21	7.11	8.25	9.63	12.30	13.29
	R407F	2.22	3.09	4.50	6.15	7.05	8.16	9.54	12.18	13.14
	R22	2.19	3.03	4.41	6.00	6.90	8.01	9.33	11.94	12.90
	R134a	1.92	2.64	3.87	5.28	6.03	7.02	8.19	10.44	11.31
T.X Valve	vR404A	A-SW	A-SW	B-SW	B-SW	C-SW	C-SW	D-SW	6-SW	6-SW
SCE / ECE & EBE 	R407F	AA-VW	AA-VW	A-VW	A-VW	A-VW	B-VW	B-VW	C-VW	C-VW
	R22	AA-VW	AA-VW	A-VW	A-VW	A-VW	B-VW	B-VW	C-VW	C-VW
	R134a	AA-JW	A-JW	A-JW	B-JW	C-JW	C-JW	C-JW	C-JW	C-JW

DIMENSIONS

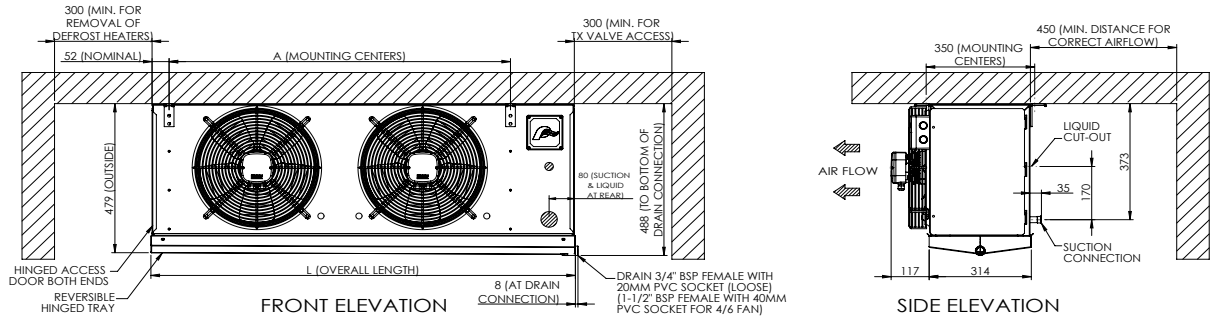

NTS (mm)

MEDIUM TEMP

MODELS	PM	30	40	50	60	70	80	95	105	110	130	140	160	190	210	
Air Throw	m	8.0	8.5	8.0	11.5	11.0	14.5	13.0	15.0	15.5	15.0	16.0	18.0	17.5	18.5	
Air Volume	l/sec	860	875	790	1720	1550	1750	1580	2320	2460	2220	3100	3520	3180	4650	
Fan Motors	Ø 350mm	Num.	1	1	1	2	2	2	3	3	3	4	4	4	6	
		Watts	175	175	175	350	350	350	350	525	525	525	700	700	700	700
		Amps	0.75	0.75	0.75	1.5	1.5	1.5	1.5	2.25	2.25	2.25	3.0	3.0	3.0	3.0
Coil	Circuit Vol.	dm3	2.20	3.30	3.30	4.41	4.41	6.60	6.60	6.60	8.82	8.82	8.82	13.36	13.36	13.36
	Connection	Dist Inlet	1/2"	1/2"	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	7/8"	7/8"	7/8"	7/8"	7/8"	7/8"
	F.Sw	Suct Outlet	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	7/8"	1-1/8"	1-1/8"	1-1/8"	1-3/8"	1-3/8"	1-3/8"
	fpi	6	6	8	6	8	6	8	8	6	8	8	6	8	8	
Defrost	Watts	1500	2090	2090	2590	2590	3620	3620	3620	3650	3650	3650	5410	5410	5410	
	L	799	1051	1051	1309	1309	1813	1813	1813	2329	2329	2329	3349	3349	3349	
Dimensions	A	540	792	792	1050	1050	1554	1554	1554	2070	2070	2070	3090	3090	3090	
	Net Weight	kg	19	22	23	29	30	44	45	50	61	62	66	72	73	82

LOW TEMP

MODELS	PL	22	30	45	60	70	80	95	120	130	
Air Throw	m	8.0	8.5	11.5	12.5	14.0	15.0	16.0	17.0	18.0	
Air Volume	l/sec	775	790	1550	1580 2095	2220	2800 3180	4200	17.0	18.0	
Fan Motors	Ø 350mm	Num.	1	1	2	2	3	3	4	4	6
		Watts	175	175	350	350	525	525	700	700	1050
		Amps	0.75	0.75	1.5	1.5	2.25	2.25	3.0	3.0	4.5
Coil	Circuit Vol.	dm3	2.20	3.30	4.41	6.60	6.60	8.82	8.82	13.36	13.36
	Connection	Dist Inlet	1/2"	1/2"	1/2"	5/8"	5/8"	7/8"	7/8"	7/8"	7/8"
	F.Sw	Suct Outlet	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8"	1-1/8"	1-3/8"	1-3/8"
	fpi	6	6	6	6	6	6	6	6	6	6
Defrost	Watts	2400	3200	4120	5780	5780	7300	7300	10820	10820	
	L	799	1051	1309	1813	1813	2329	2329	3349	3349	
Dimensions	A	540	792	1050	1554	1554	2070	2070	3090	3090	
	Net Weight	kg	20	23	29	45	50	60	65	75	83

CAPACITY CORRECTION

PM @ °C SST	LL @ °C SST	PM @ °C SST	LL @ °C SST
5°	1.17	-20°	1.07
0°	1.07	-25°	0.99
-5°	0.99	-30°	0.89
-10°	0.93	-35°	0.80

RELATIVE HUMIDITY GUIDE

Temp Diff	R.H %	Temp Diff	R.H %
2K	94	10K	77
4K	89	12K	73
6K	84	14K	70
8K	81	16K	66

NOTES:

- Air throw based on CRMA standard @ 20°C. Multiply figures by 0.94 for 2°C and 0.87 for -18°C.
- Fan motors 220-240V/1/50Hz.
- Defrost heaters 220-240V/1/50Hz. Connect in Y for 380-420V/3/50Hz supply.

Specifications subject to change without notice